


GLEASON PowerTrak®

E-TYPE SPLICING INSTRUCTIONS

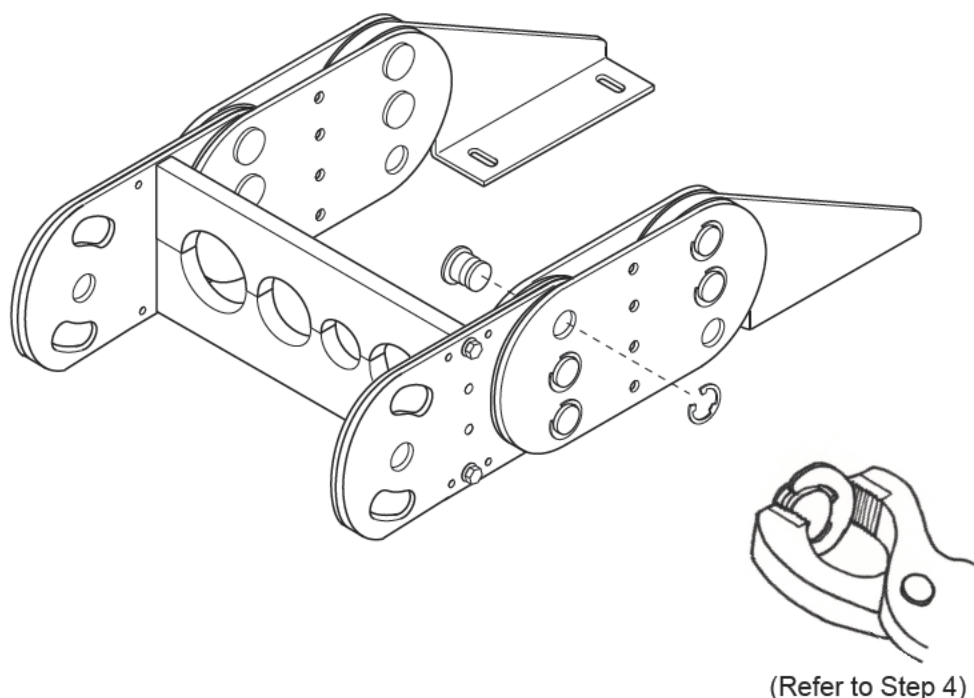

(Refer to Step 4)

STEPS:

1. Slide chains together to form a clevis.
2. Insert nylon discs at each joint between the outer link and inner link (2 per joint).
3. Insert hinge pins (3 per joint).
4. Slide one E-ring into the groove at the end of the Hinge Pin. Use a Channel-Lock Pliers to grip the OD of the E-ring and the Pin. Then squeeze the Pliers handles tightly until the E-ring “snaps” into the bottom of the groove. Be certain the middle “tab” on the E-ring is seated at the bottom of the groove.

MODEL	SPLICE KIT P/N	
	STEEL	STAINLESS STEEL
PT25E	034417	N/A
PT28E	034418	048524
PT35E	034419	039436
PT38E	034420	039533
PT45E	034421	039447
PT48E	034422	049994

NOTE: Splice kits include (6) hinge pins, (4) anti-friction discs, and (12) E-ring fasteners



Gleason Reel Corp.
 600 South Clark St.
 Mayville, WI 53050
 Phone: 920-387-4120
 Fax: 920-387-4189
www.hubbell-gleason.com

044523.c



Zampini Industrial Group

Trusted Industrial Suppliers Since 1986

85 Industrial Circle, Suite 2211

Lincoln, RI 02865

USA

Factory Authorized Gleason Reel Suppliers
FAST Quotes, FAST Delivery!



ZAMPINI INDUSTRIAL GROUP



Contact Us For Your Gleason Reel Products and Parts Today!

Email Us

Call Us

Fax Us



info@AirToolPro.com

1-800-353-4676
1-401-305-7997

1-401-305-7988



We Respond **FAST!**
Minimize Your Downtime!



Numerous Ways To Get Pricing



Guaranteed Satisfaction!
Excellent Service Since 1967!



Everyday Discounts
Quantity Discounts
Email Specials
Low Price Guarantee